

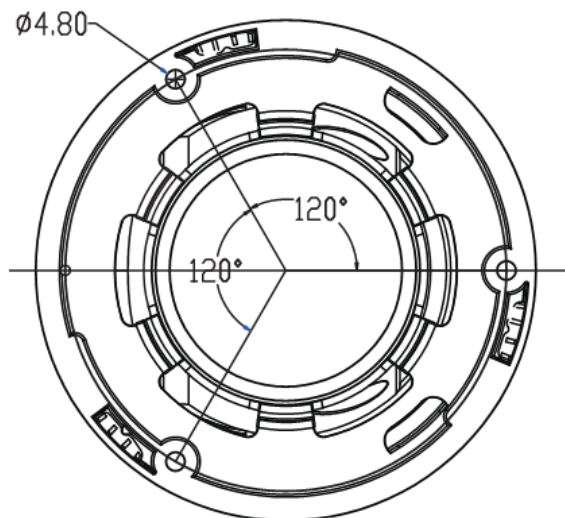


# 5MP Color Vu Fixed Turret POE Dome IP Camera

Model: PARA-716CB97A

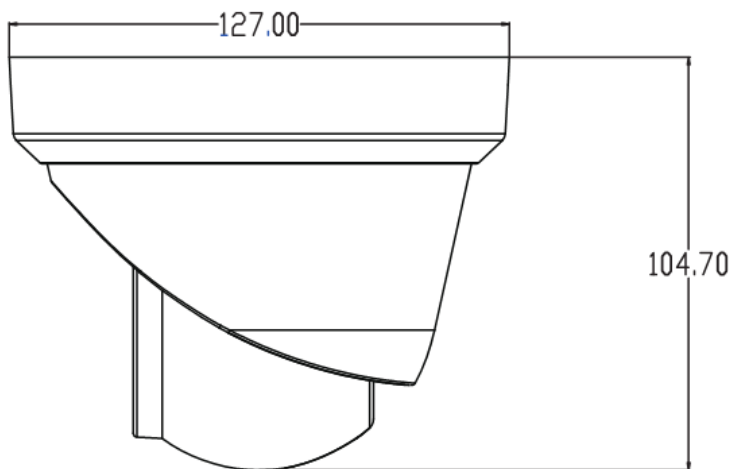

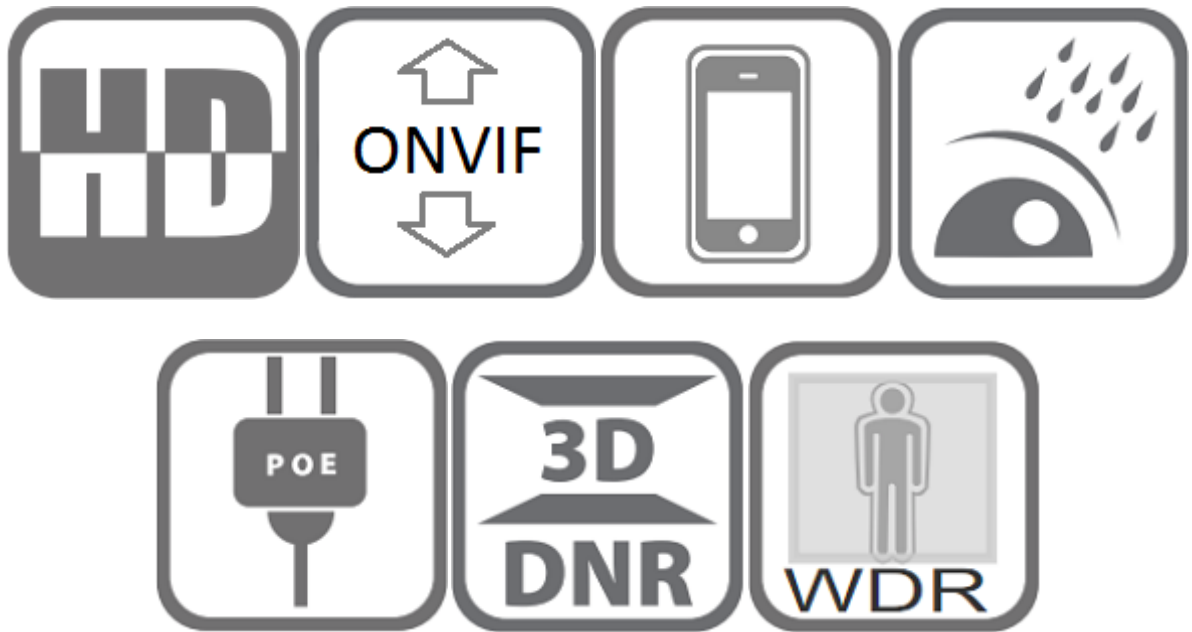

## Features:

5/6 MP Colorvu 7/24 hours Colorful View POE Waterproof Dome Turret IP camera

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ Full HD resolution 2592 x 1944P
- ❖ Ultra low illumination 0.001Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Internal Microphone, reset button optional
- ❖ Lightning protection 4000V
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Strong water-proof housing, IP67
- ❖ 2PCS Soft & Warm Supplemental Light, Light distance: 25-30M
- ❖ HD 2.8mm F1.0 true starlight lens

## Technical Specifications:

|                          |   |
|--------------------------|---|
| <b>Model</b>             | <b>PARA-716CB97A</b>  |
| <b>Camera</b>            |   |
| Image Sensor             | 1/2.8" Sony CMOS  |
| Effective Pixels         | 3072(H)×2048 (V)  |
| Electronic Shutter       | AUTO, 1/25s ~ 1/100000s   |
| Min. Illumination        | 0.01Lux@F1.2(AGC ON), 0Lux IR on  |
| Day/Night                | Auto/Color/(B/W)/Timing   |
| WDR                      | Digital WDR   |
| White Balance            | Auto/Manual   |
| AGC/BLC/HLC              | Support   |
| DNR                      | 2D/3D DNR   |
| Other                    | Multi-lines OSD, Motion Detection, Privacy Mask, Mirror   |
| <b>Encode</b>            |   |
| Video Standard           | H.264/H.265   |
| Video Resolution         | Main Stream:<br>25fps@5MP(2592x1944), 30fps@4MP/3MP/1080P/720P<br>Sub stream: 30fps@D1/VGA/360P/CIF, etc. |
| Video Bitrates           | 64Kbps - 8Mbps, VBR/CBR   |
| Audio Standard           | G.711-u/G.711-a/AAC   |
| Built-in Mic             | Yes   |
| Smart Event              | Human Detection<br>Vehicle Detection<br>Motion Detection  |
| <b>IR Led</b>            |   |
| IR Led                   | 2PCS Soft & Warm Supplemental Light   |
| IR Distance              | 20-30 M   |
| <b>Lens</b>              |   |
| Focal length             | HD 2.8mm F1.0 true starlight lens   |
| <b>Optional Function</b> |   |
| Audio, etc.              |   |
| <b>Network Services</b>  |   |
| Protocol                 | HTTP(S)/RTSP/RTMP/FTP/NFS/SMTP/DHCP/NTP, etc.   |
| P2P                      | Yes   |
| Web                      | IE , Firefox 32bit ESR, etc.  |
| Media                    | CMS, Android, IOS   |
| ONVIF                    | 17.06 compatible  |
| <b>General</b>           |   |
| Network Port             | 1-RJ45, 100Mbps, POE  |
| Power Supply             | 12 VDC ± 10%  |
| POE                      | IEEE802.3af PoE   |
| Power Consumption        | < 5 W   |
| Operating Temp.          | -30°C(+60)°C 10%-90%RH  |