




6MP Multi-function IP Box Camera with Audio/SD Slot/Alarm

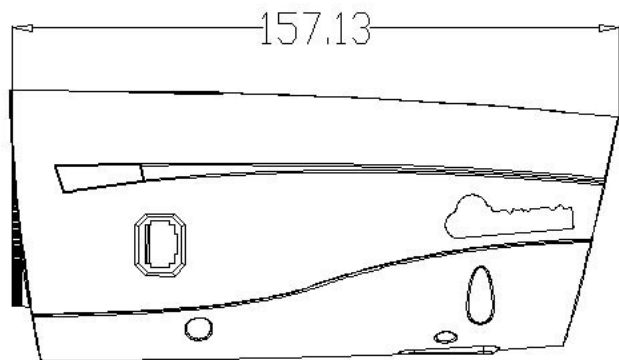

Model: PARA-716FSAQ961

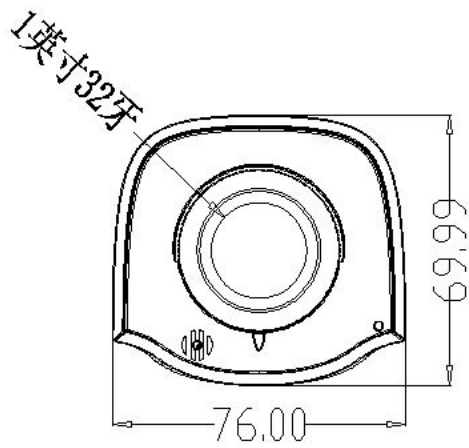

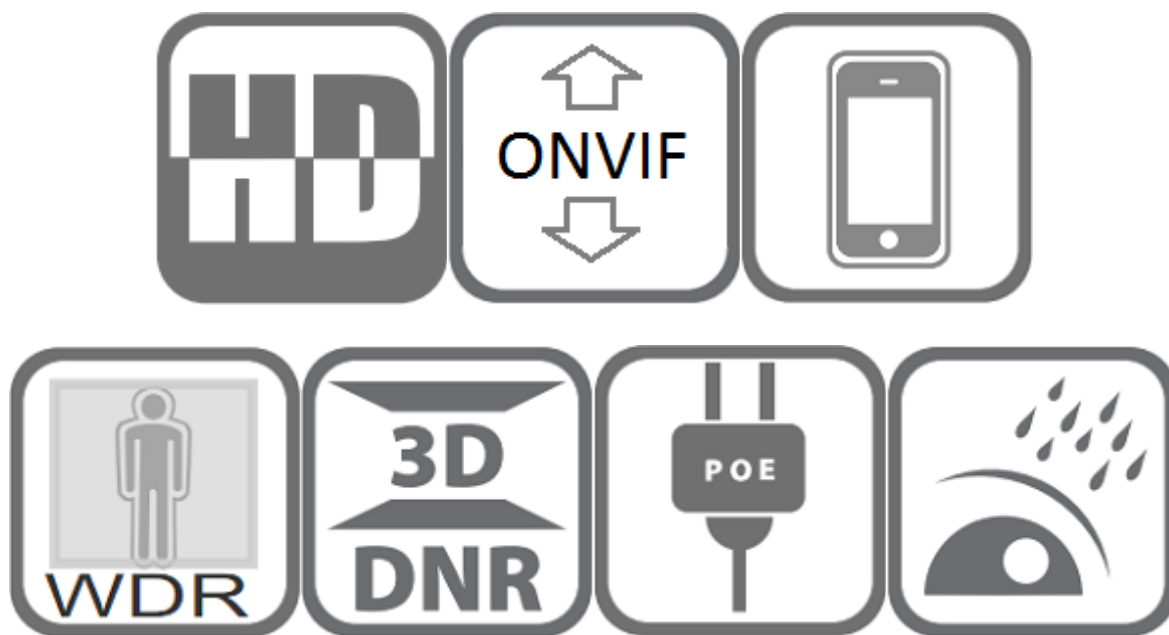

Features:

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ 6MP HD resolution 3072 x 2048 output
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Human/Vehicle Detection, Privacy Mask, Flip
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ No IR LEDs
- ❖ Lens not included

Technical Specifications:

Model	PARA-716FSAQ961
Camera	
Image Sensor	1/2.8" IMX335 CMOS
Effective Pixels	3072(H)×2048(V)

Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold	
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on	
Day/Night	Auto/Color/(B/W)/Timing	
WDR	Digital WDR / HDR	
White Balance	Auto/Manual	
BLC/HLC	Support	
DNR	2D/3D DNR	
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination	
License Plate Mode	Yes	
Other	Multi-lines OSD, Custom Title, Privacy Mask, Flip	
Encode		
Embedded Solution	SSC377D	
Video Standard	H.264/H.265/H.265+	
Video Resolution	Main 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.	Stream:
Video Bitrates	512Kbps - 8Mbps, VBR/CBR	
Audio Standard	G.711-u/G.711-a/AAC	
Audio/SD Slot/Alarm	Yes	
Smart Detection		
Motion Detection	Support	
Target Detection	Human and Vehicle Detection	
IR Led		
IR Led	No	
Lens		
Focal length	Lens not included	
Language		
English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.		
Network Services		
Protocol	HTTP/RTSP/FTP/NFSv3/SMTP/DHCP/NTP/RTMP, etc.	
P2P	Yes	
Web	IE, Firefox, Chrome, Edge, Safari, etc.	
Media	CMS, Android, IOS	
ONVIF	17.06 compatible	
General		
Network Port	1-RJ45, 100Mbps	
Power Supply	12 VDC ± 10%	
POE	802.3af/at 48V	
Power Consumption	< 8 W	
Operating Temp.	-30°C-(+60)°C, 10%-90%RH	